

INSTALLATION INSTRUCTIONS

Accessory

SIDE POCKET NET P/N 08L72-HR4-A20

Application


After '13 TRX420 (all) After '13 TRX500 (all) Publication No.

MII 14766

Issue Date

November 2013

## **PARTS LIST**

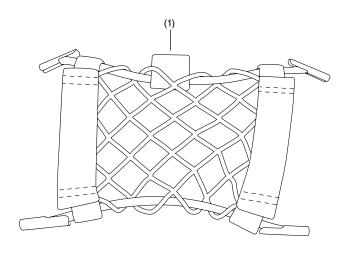


No.	Description	Qty
(1)	Side pocket net	1


## **USE AND CARE INFORMATION**


- Check the accessory mounts frequently and retighten if necessary
- Replace this accessory with a new one if it is damaged.

## **INSTALLATION**


- 1. Using the procedures in the Service Manual, remove the seat, center cover, and left side cover.
- 2. With the pull tab towards the top of the vehicle, insert the net crimps into the four pre-drilled holes.







3. The net crimps should toggle once they go through the holes, and they should not be able to come back out of the holes so that the side pocket net remains in place.



4. Reinstall the left side cover, center cover, and seat as instructed in the Service Manual.