



**EVOTECH**®  
P E R F O R M A N C E

**Installation Instructions**



## EVOTECH PERFORMANCE BRAKE AND CLUTCH LEVERS

### Instruction Contents

**Section 1** - Cable Clutch

**Section 2** - Hydraulic Brake and Clutch


**Section 3** - Ducati Hydraulic Brake and Clutch

**Section 4** - Aprilia Tuono V4/RSV4 2015 Cable Clutch

**Section 5** - Coloured adjuster replacement


A large, light gray watermark of the EP logo is centered on the page, serving as a background for the section title. It is contained within a light gray rounded rectangular border.

**Section 1** - Cable Clutch

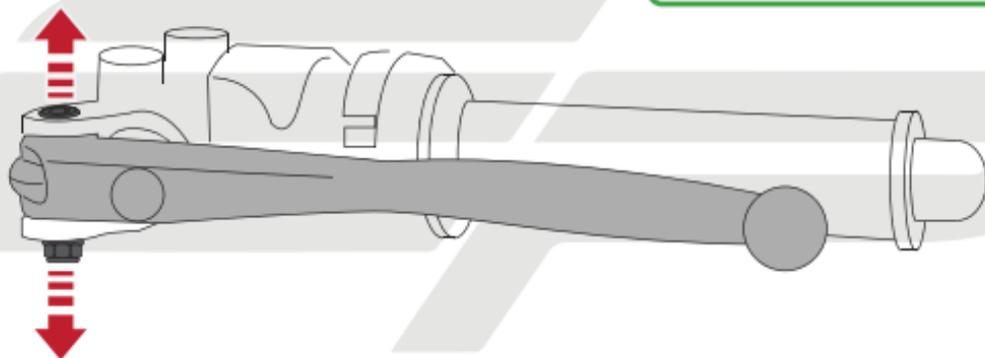


Caution


Completely remove security nut  
from underneath first  
then remove the bolt

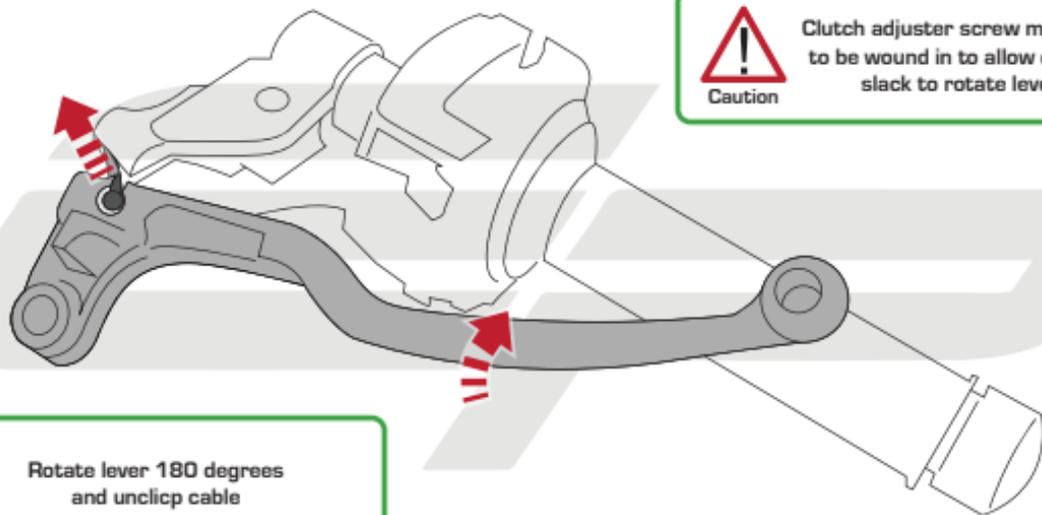


Clutch adjuster screw may need to be wound in to allow enough slack to rotate lever

Rotate lever 180 degrees and unclip cable

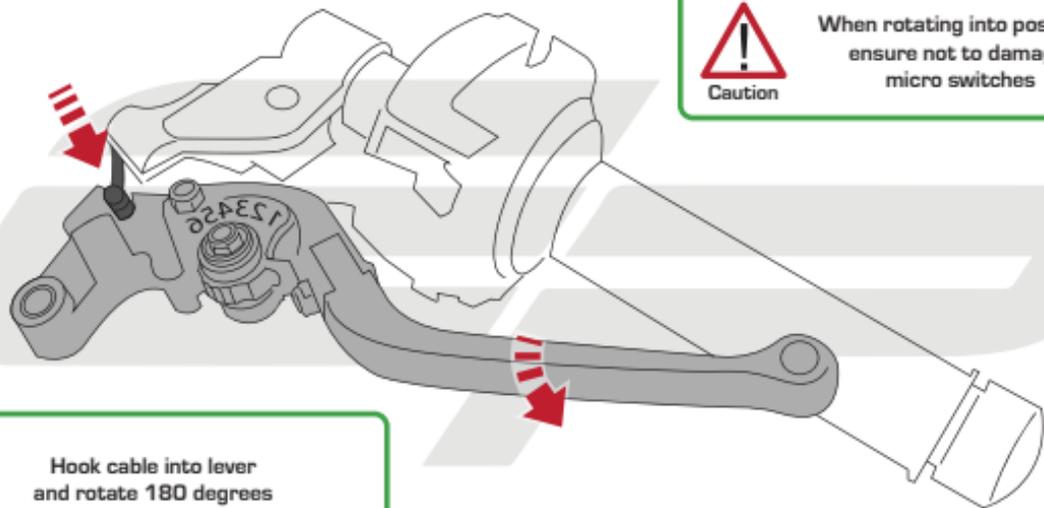

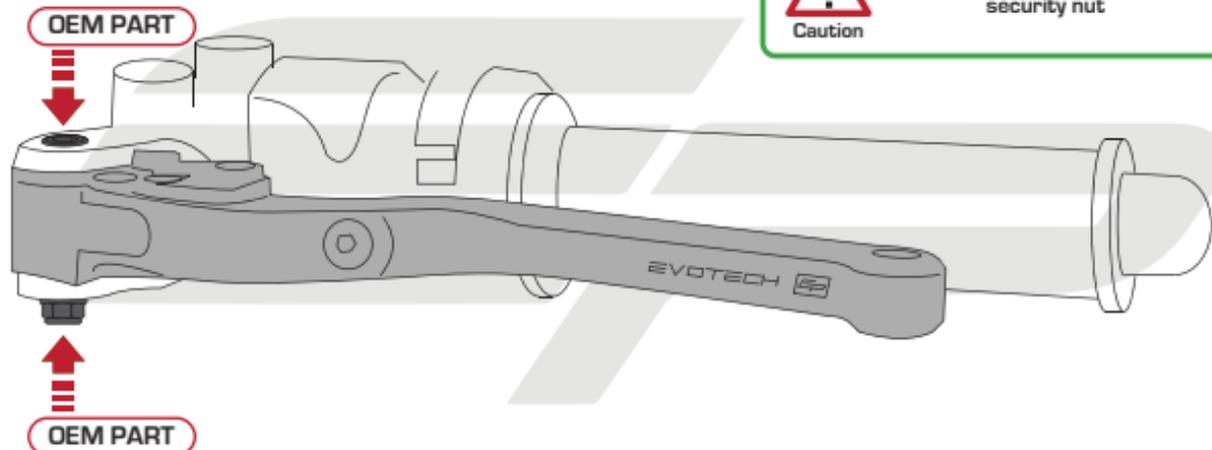

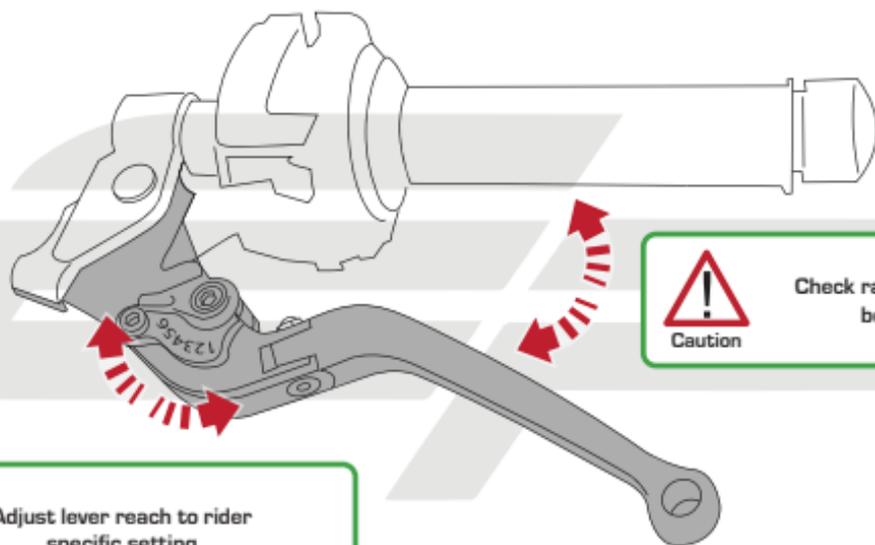

Adjust lever reach to rider  
specific setting



Caution


Check range of movement  
before riding



**Section 2** - Hydraulic Brake and Clutch




Completely remove security nut  
from underneath first  
then remove the bolt

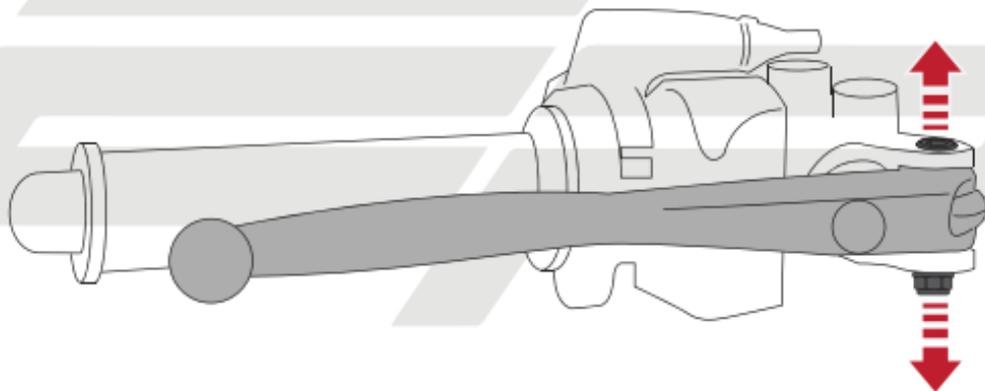



Caution


Remove lever ensuring not  
to damage rubber seal

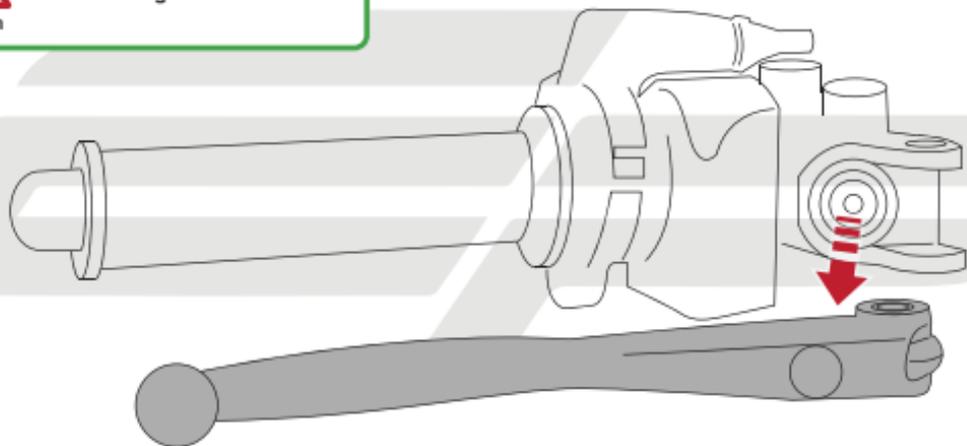



Caution

**DO NOT** over-tighten  
security nut

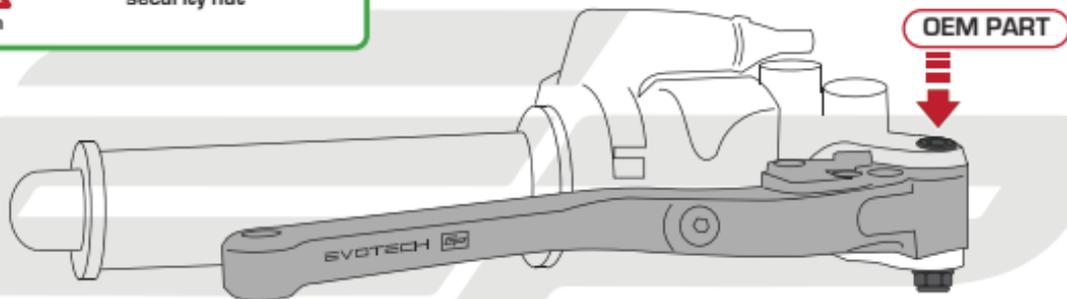

OEM PART



Caution


When placing into position  
ensure not to damage  
micro switches

OEM PART



Caution

Check range of movement  
before riding

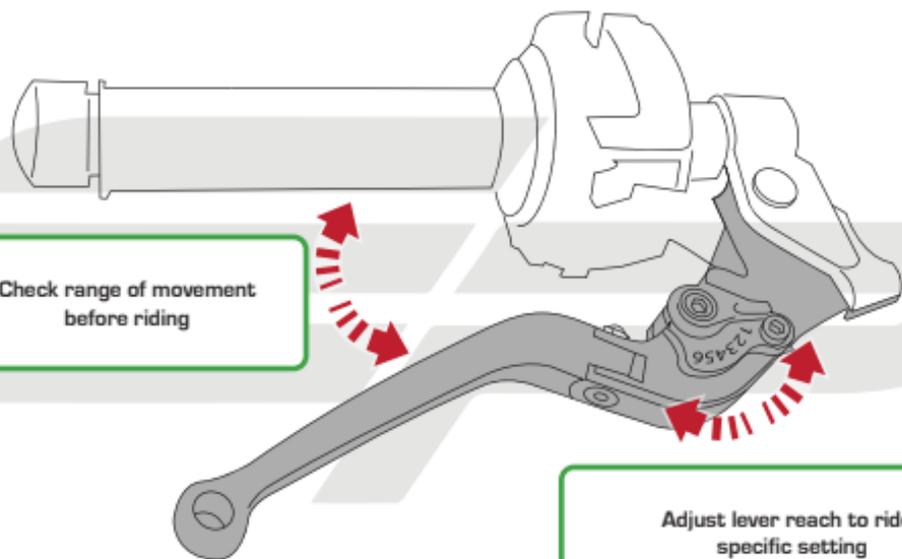

Adjust lever reach to rider  
specific setting




**Section 3** - Ducati Hydraulic  
Brake and Clutch




Caution


Completely remove security nut  
from underneath first  
then remove the bolt

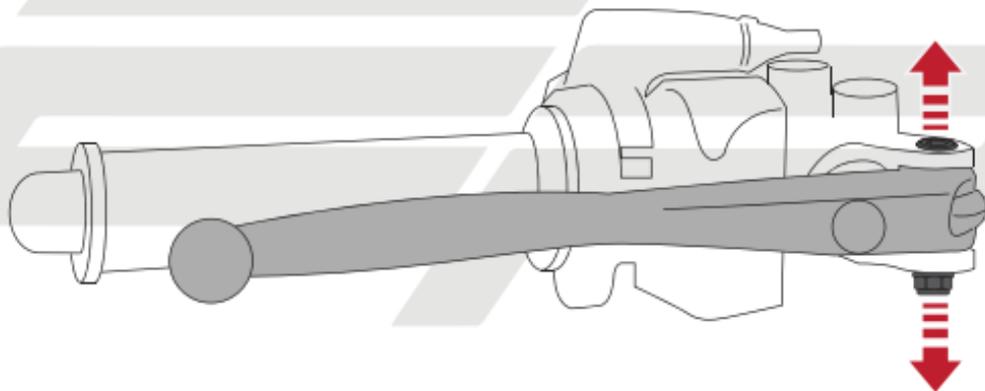



Remove lever ensuring not  
to damage rubber seal

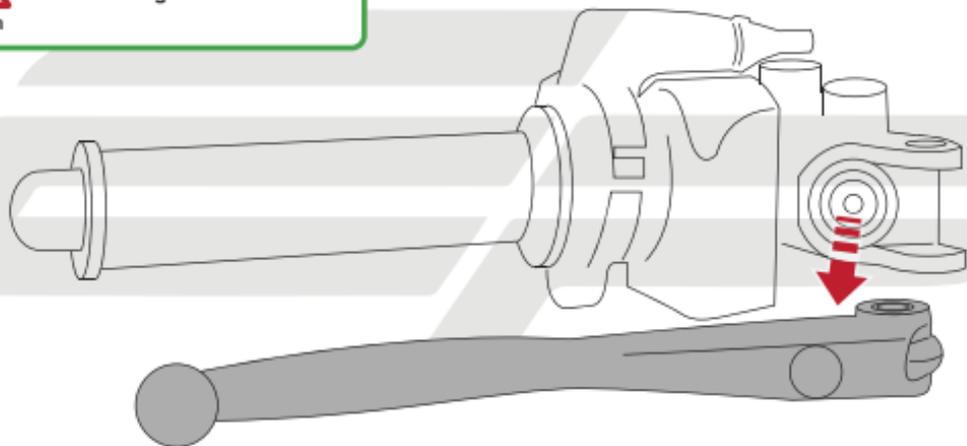


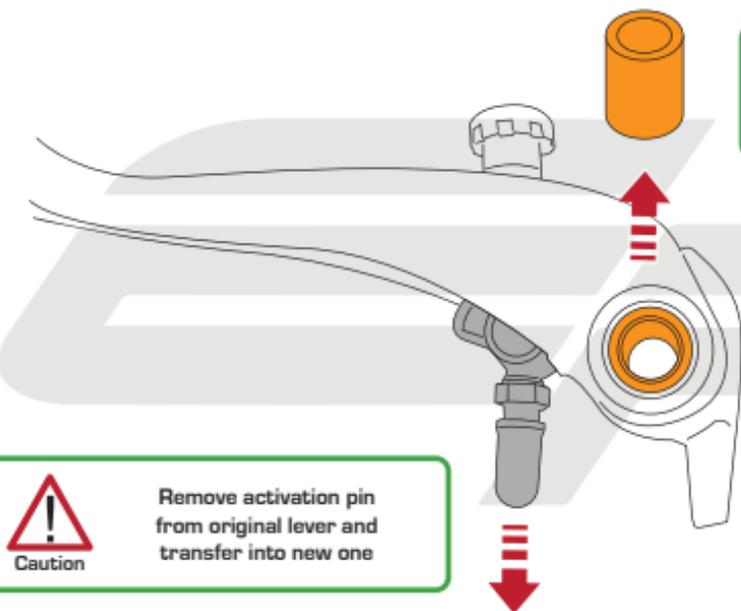

Remove brass bush from original lever and transfer into new lever




Remove activation pin from original lever and transfer into new one

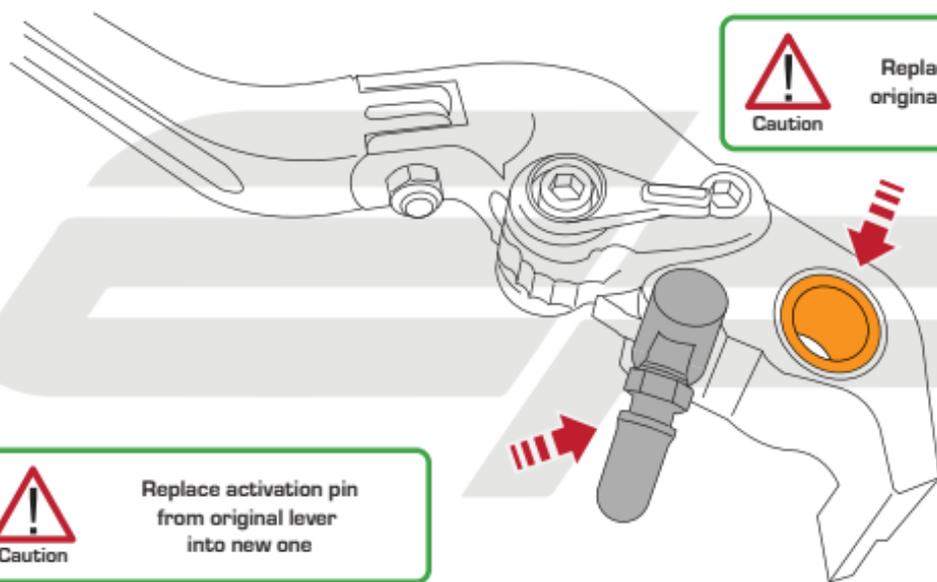



Caution

**DO NOT** over-tighten  
security nut

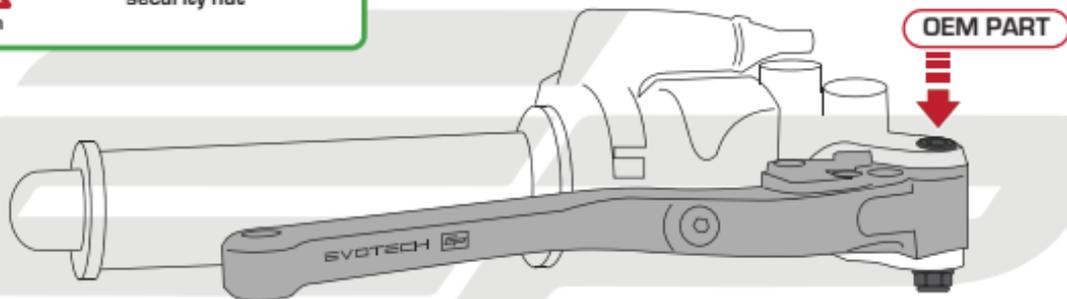


Caution

When placing into position  
ensure not to damage  
micro switches



Caution

Check range of movement  
before riding

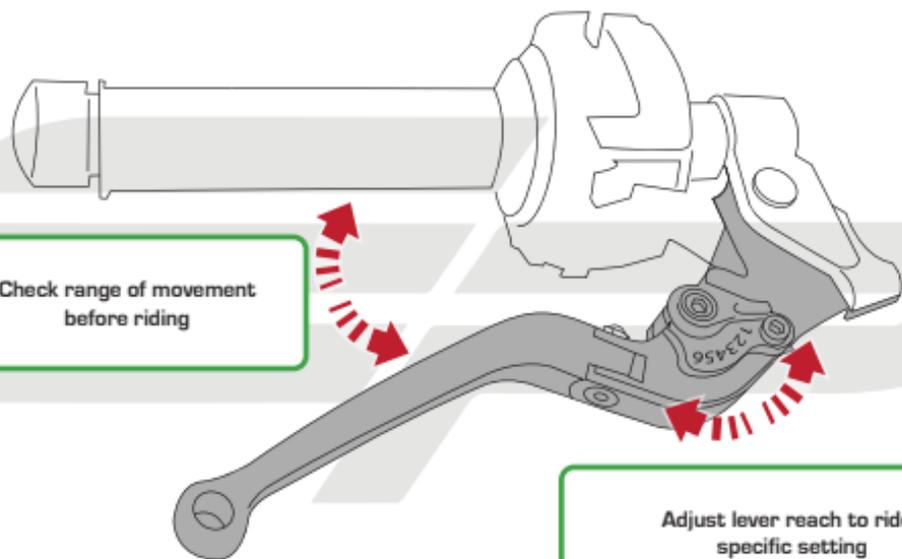

Adjust lever reach to rider  
specific setting





**Section 4** - Aprilia Tuono V4 2015  
and RSV4 2015 Clutch



Caution

Completely remove security nut  
from underneath first  
then remove the bolt

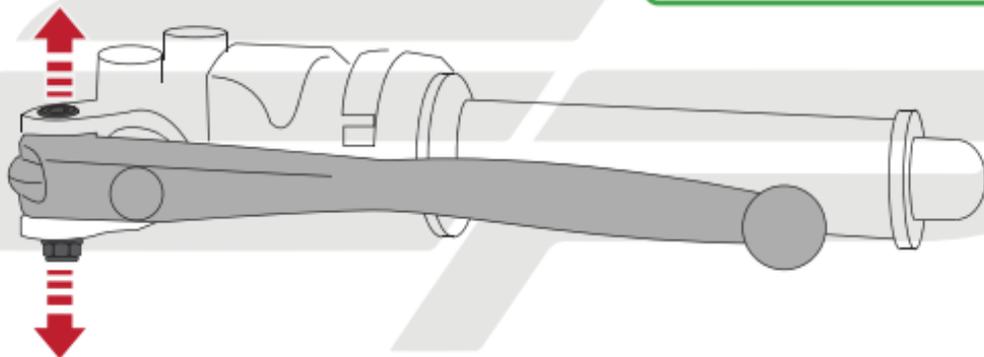

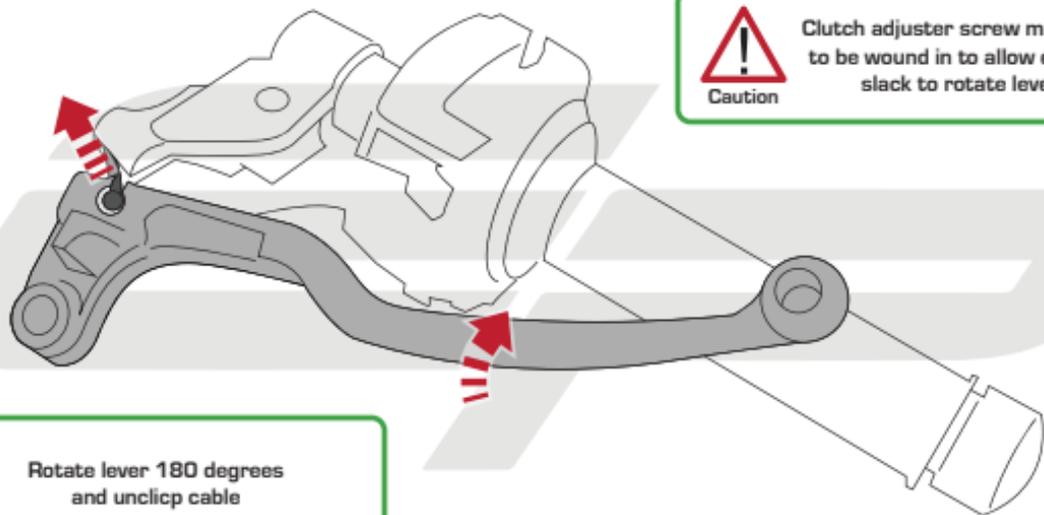


Rotate lever 180 degrees  
and unclip cable





Caution


Clutch adjuster screw may need  
to be wound in to allow enough  
slack to rotate lever

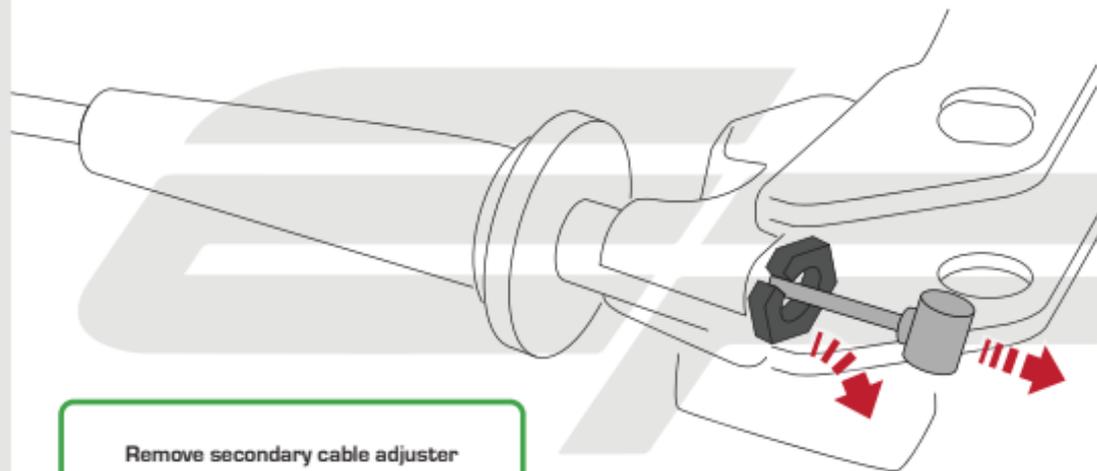

Remove secondary cable adjuster  
from inside lever

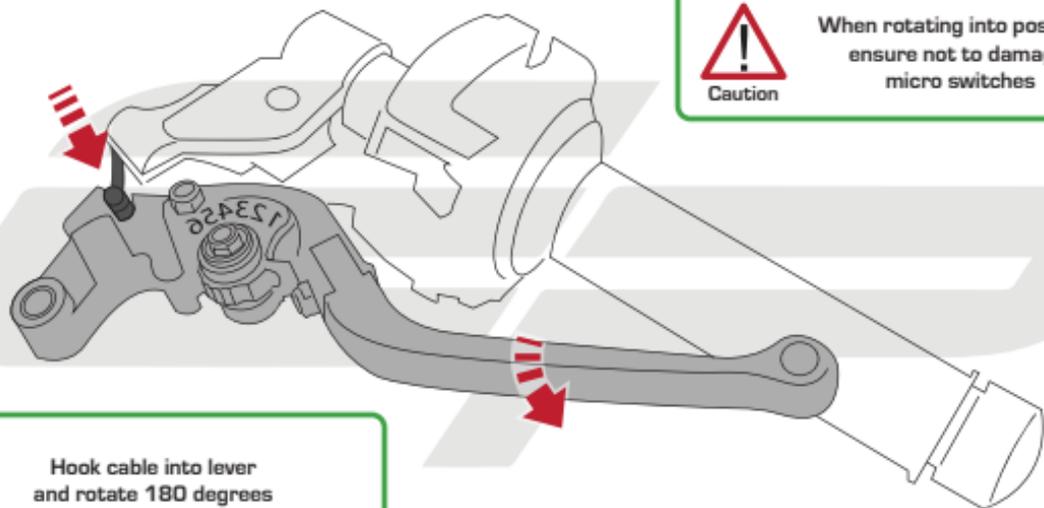

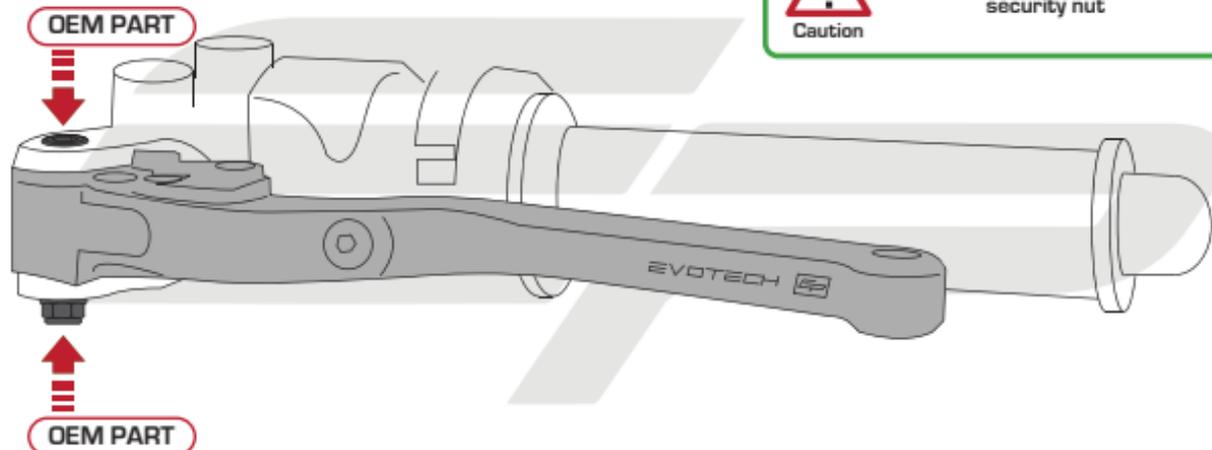

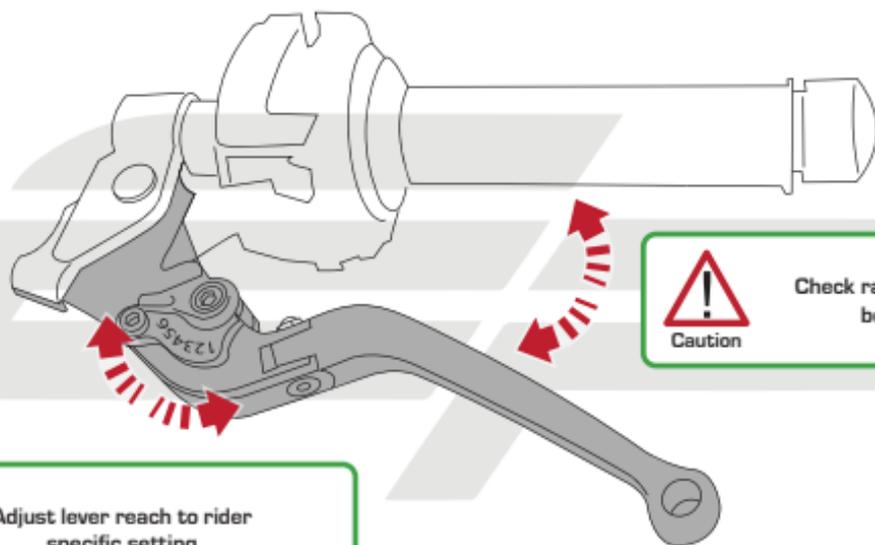

Adjust lever reach to rider  
specific setting



Caution

Check range of movement  
before riding





## Section 5 - Coloured Adjuster Replacement





Caution


Completely remove security nut  
from underneath

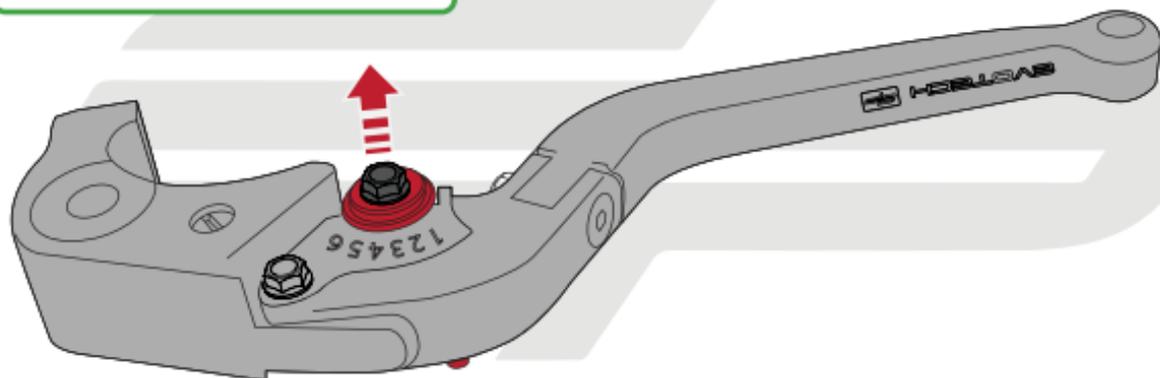


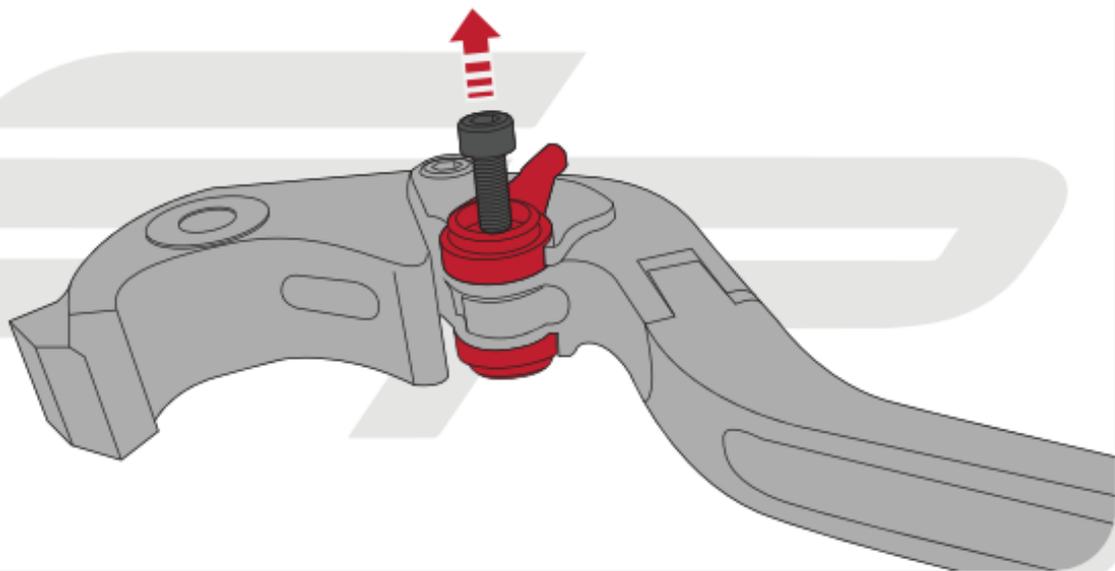


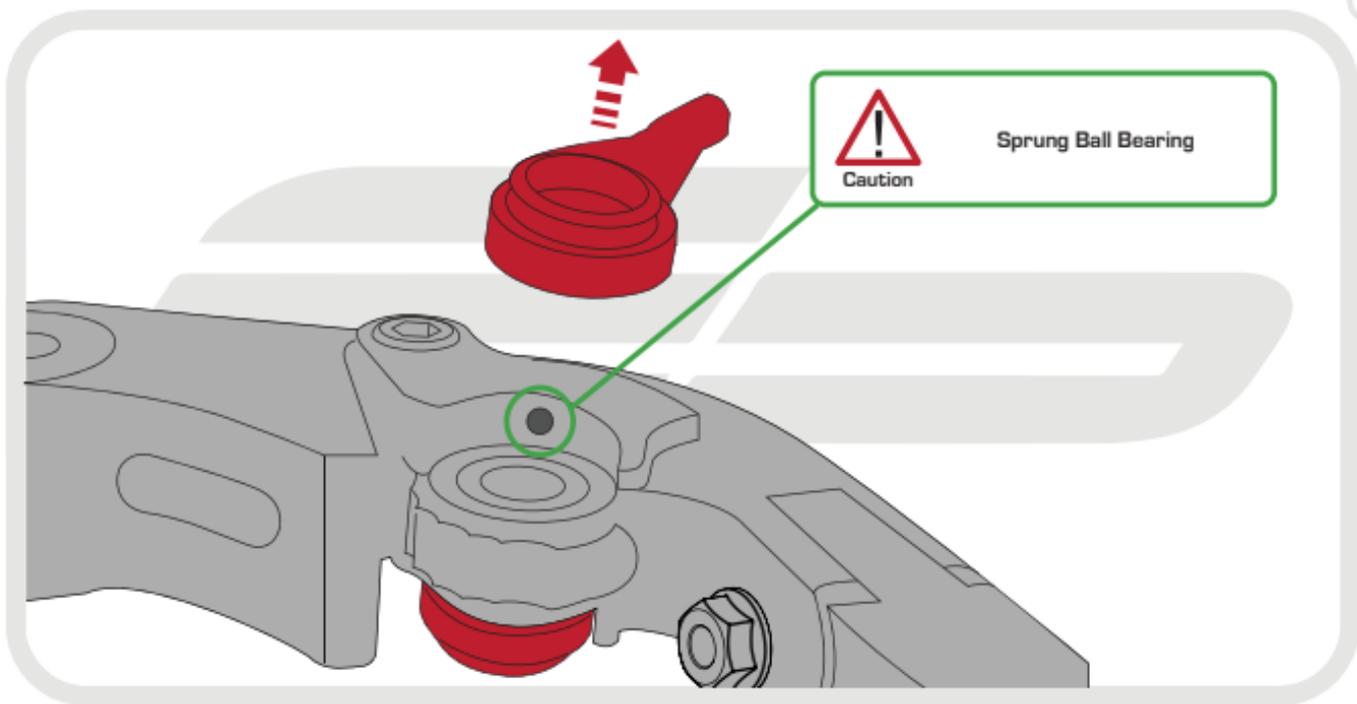


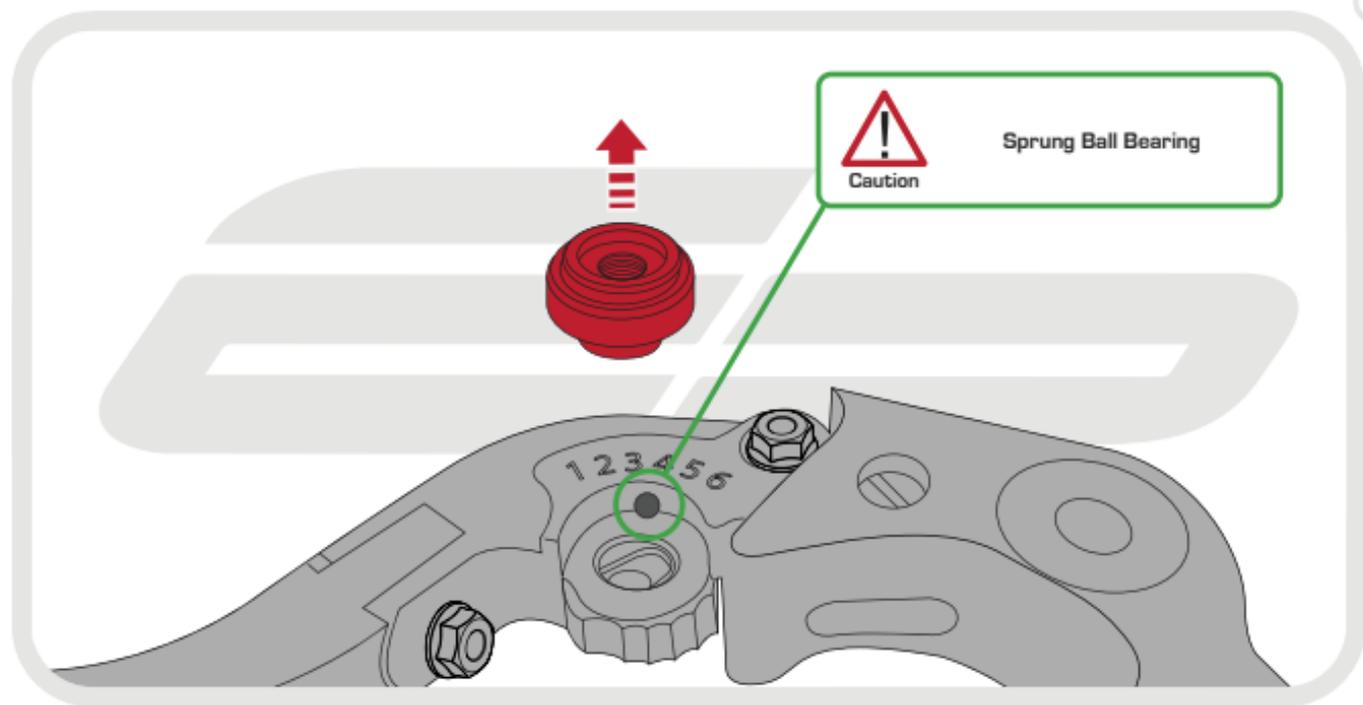

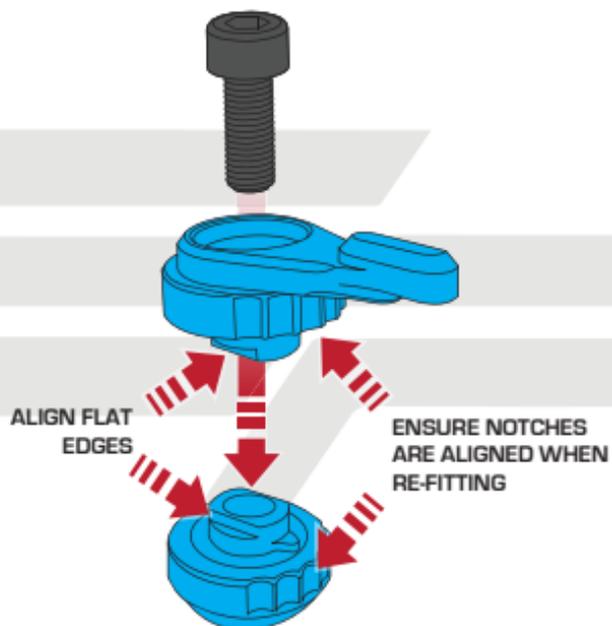

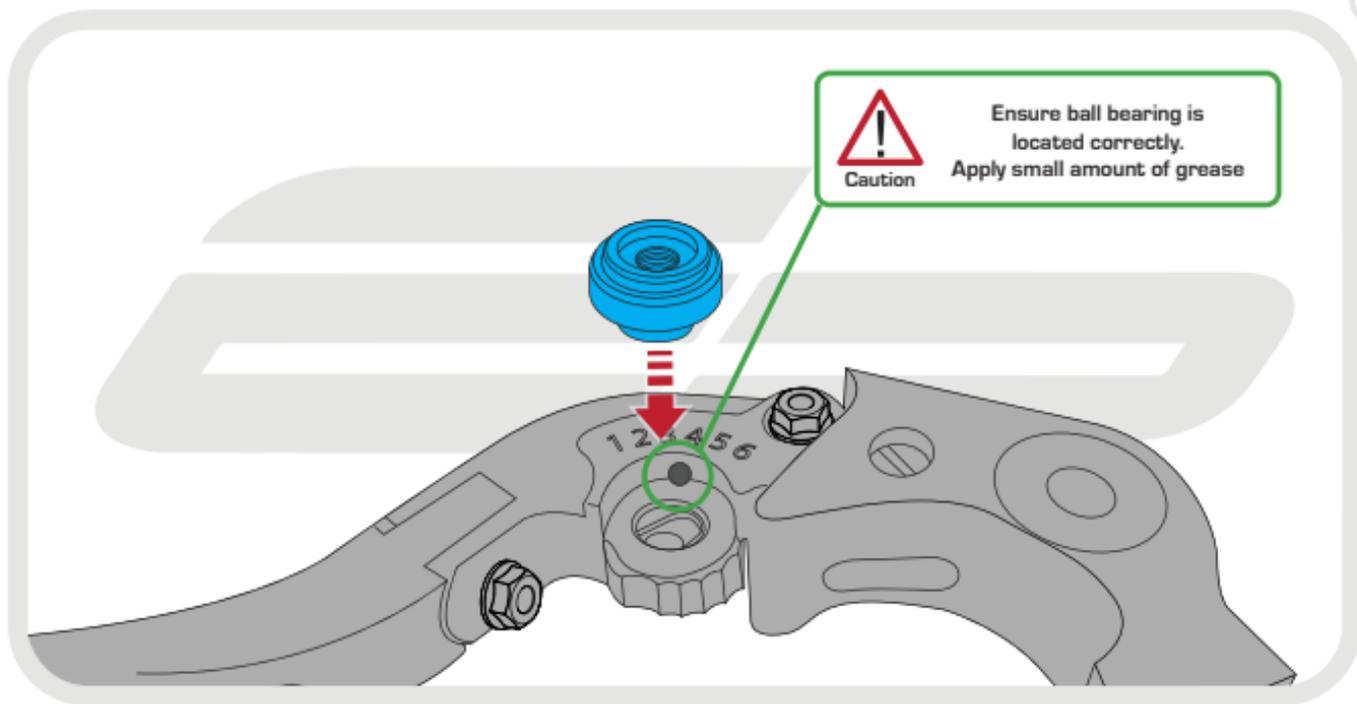

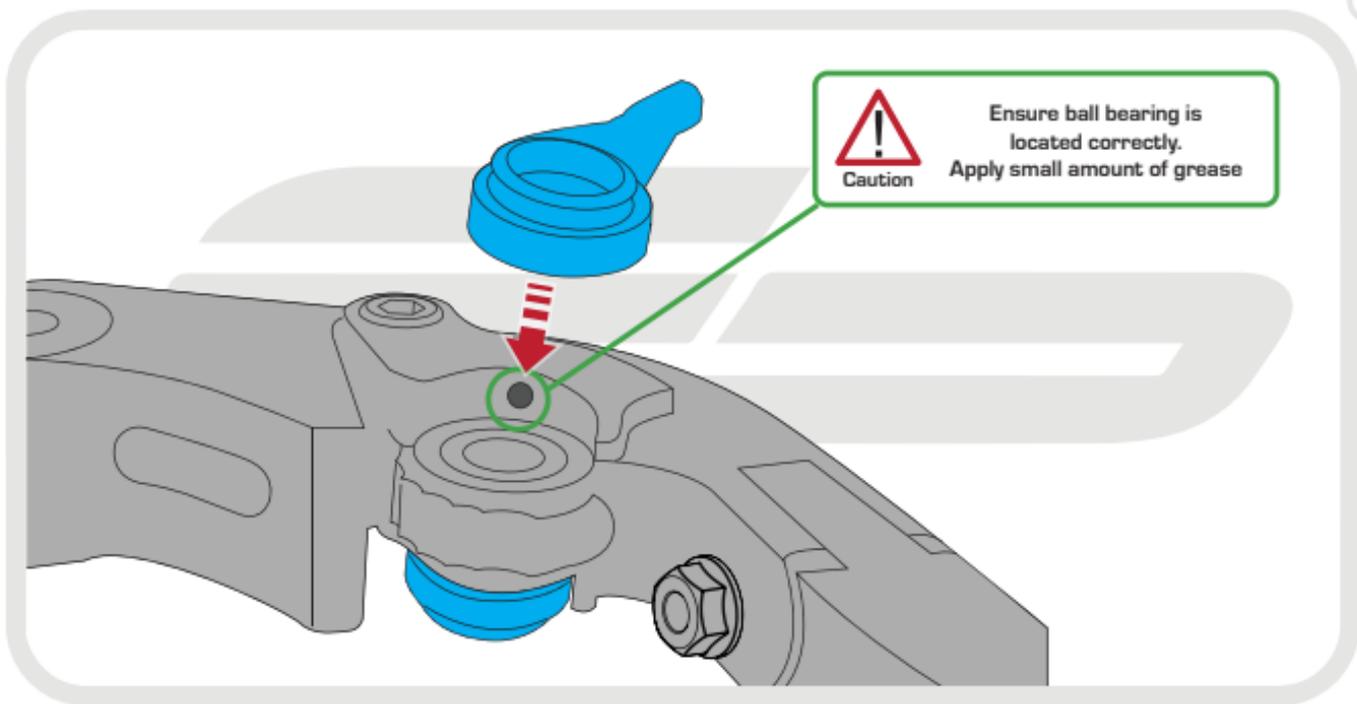


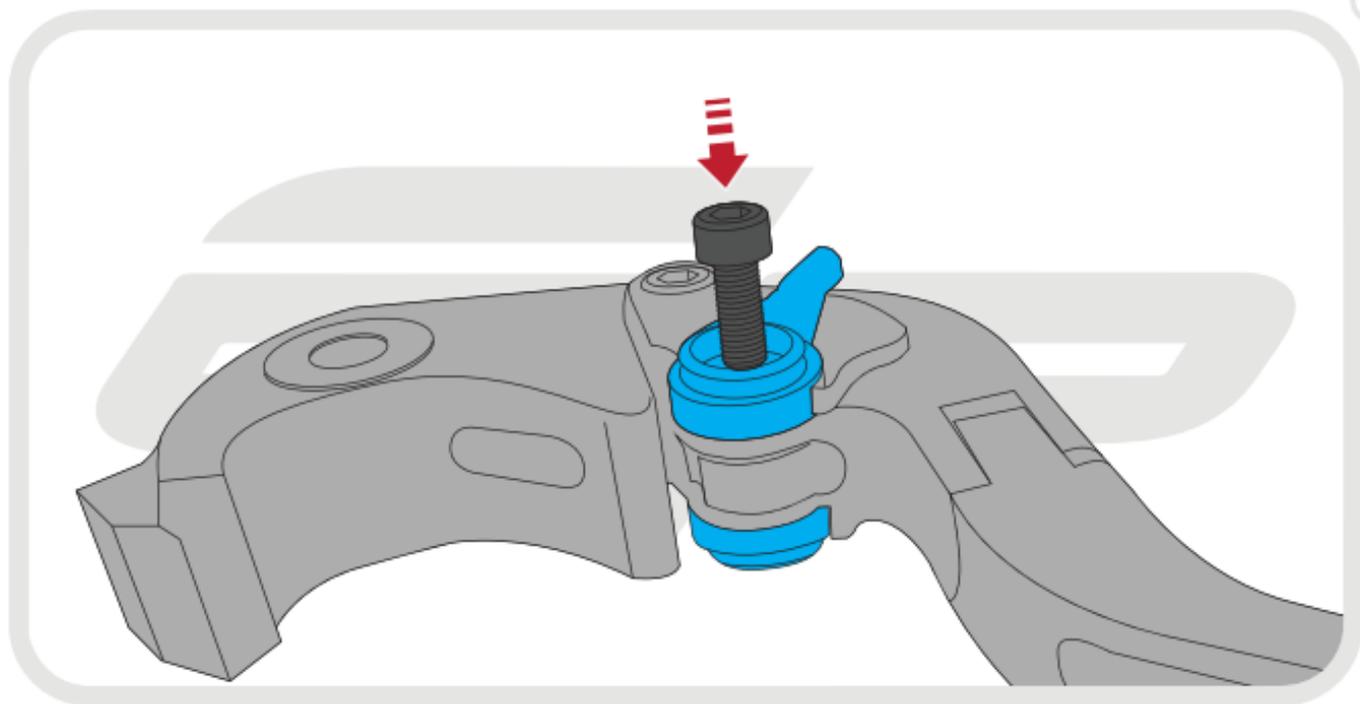



Caution

DO NOT over-tighten  
security nut

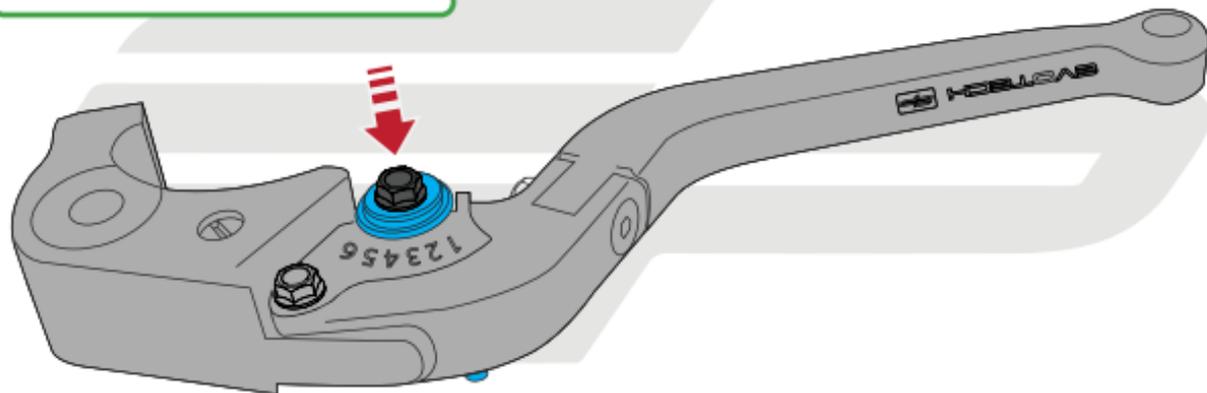



**EVOTECH**®  
P E R F O R M A N C E

[www.evotech-performance.com](http://www.evotech-performance.com)