


Accessory	Application	Publication No.
LIGHT BAR P/N 08P71-MKA-D80	After '15 NC700X/XD	MII 15736
		Issue Date
		March 2016

Honda Dealer: Please give a copy of these instructions to your customer.

PARTS LIST

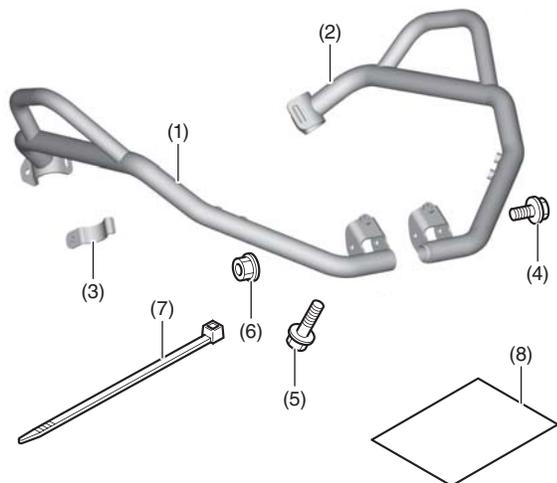

No.	Description	Qty
(1)	Right light bar	1
(2)	Left light bar	1
(3)	Light bar holder	2
(4)	6 mm flange bolt (short)	3
(5)	6 mm flange bolt (long)	2
(6)	6 mm flange nut	3
(7)	Wire tie	1
(8)	Installation Instruction URL	1

TOOLS REQUIRED

Socket (10 mm)

Ratchet

Box-end wrench (10 mm)

Torque wrench

TORQUE INFORMATION

Refer to the Service Manual for the torque values of the removed parts. Unless otherwise indicated, follow the specified torque in the chart.

Item	N·m	kgf·m	lbf·ft
6 mm flange bolt and nut	12	1.2	9

Please Convey the Following Information to the Customer During Delivery

NOTICE:

- **DO NOT GRASP THE LIGHT BAR OR ATTACHED ACCESSORIES TO MOVE THE MOTORCYCLE AS IT MAY DAMAGE THE MOTORCYCLE AND ACCESSORIES.**

INSTALLATION



▲ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc. to cool before installing the accessory.



NOTE:

- This manual is focusing on NC700XD, but other models are similar. If there are any differences, each difference will be described in this manual.
- Take care not to damage the painted surfaces of the motorcycle.


1. Loosely install the right light bar as shown.

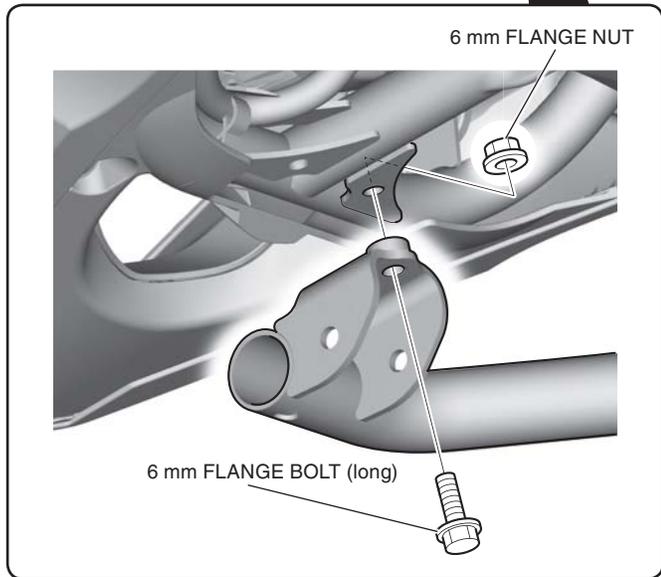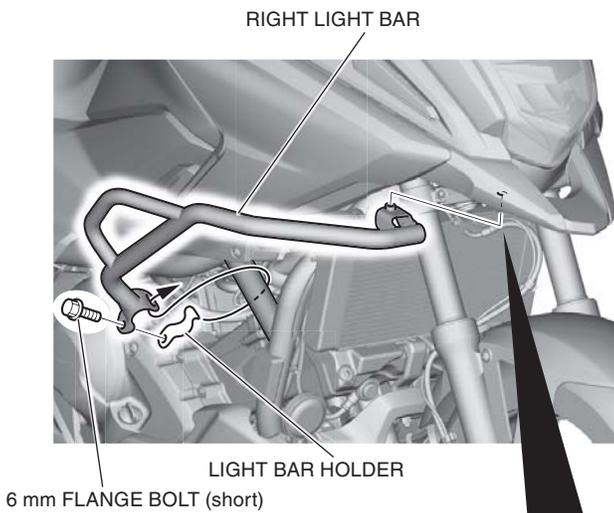

2. Loosely install the left light bar as shown.

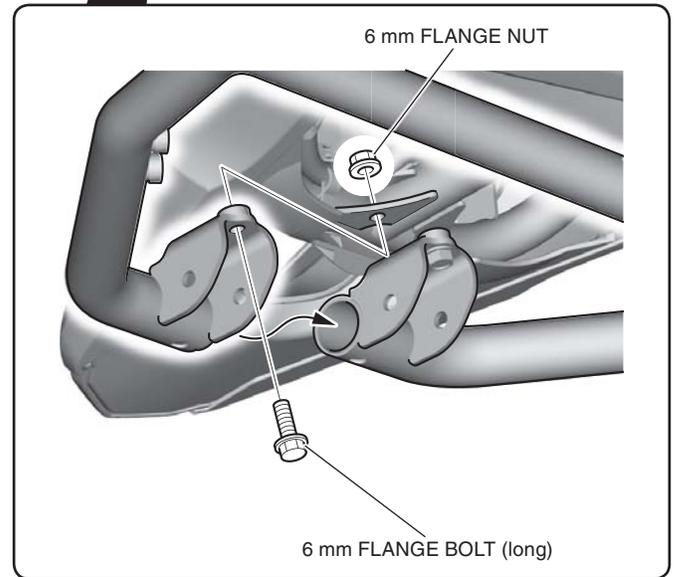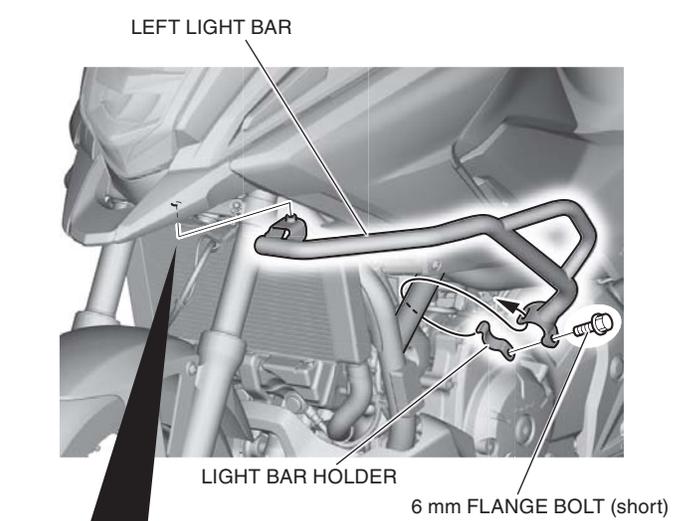

3. Install the 6 mm flange bolt (short) and 6 mm flange nut as shown.

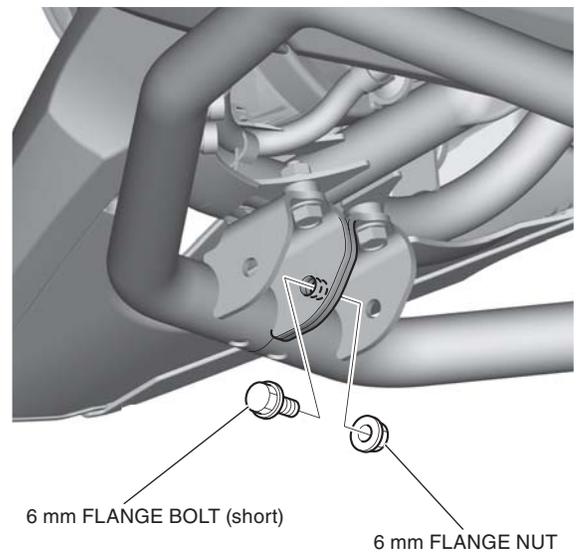

4. Tighten all loosely installed hardware.

5. Secure the motorcycle's horn wire with the wire tie as shown.

