


Accessory	Application	Publication No.
REAR TIRE HUGGER P/N 08F70-MJM-D10	VFR800F/D	MII 14983
		Issue Date
		June 2014

PARTS LIST

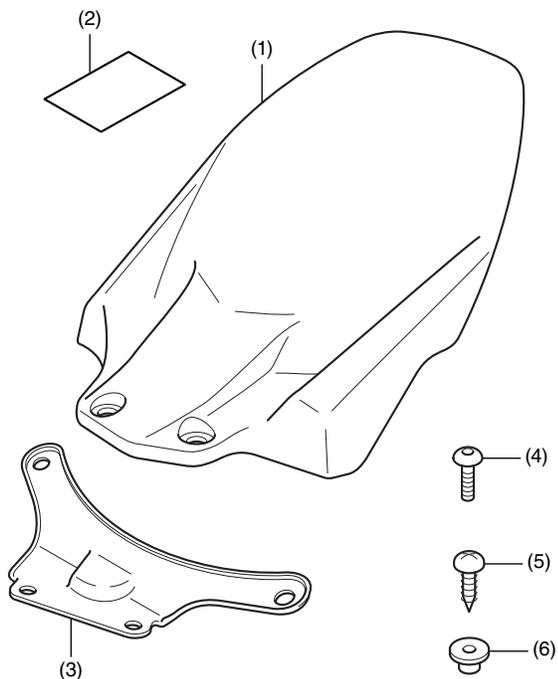

No.	Description	Qty
(1)	Hugger	1
(2)	Installation Instruction URL	1
(3)	Hugger stay	1
(4)	6 mm bolt	2
(5)	5 mm screw	2
(6)	Collar	2

TOOLS AND SUPPLIES REQUIRED

Hex wrench (5 mm)

Phillips screwdriver

Torque wrench

TORQUE CHART

Tighten all screws, bolts, and nuts to their specified torque values. Refer to the Service Manual for the torque values of the removed parts.

Item	N-m	kgf-m	lbf-ft
5 mm screw	4.2	0.4	3.1
6 mm bolt	10	1.0	7


INSTALLATION

▲ CAUTION


- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.

- Remove the splash guard as shown.


<Rear side>

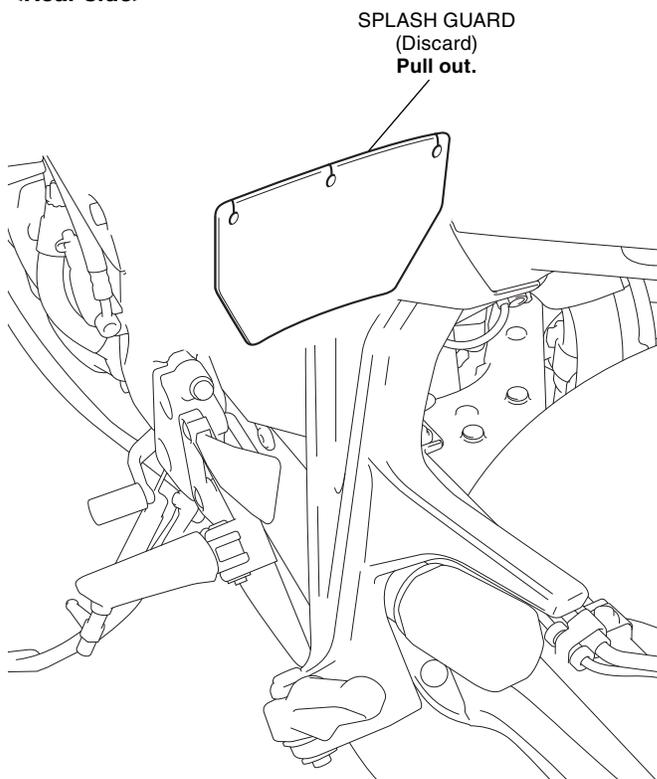

2. Remove the clips as shown.

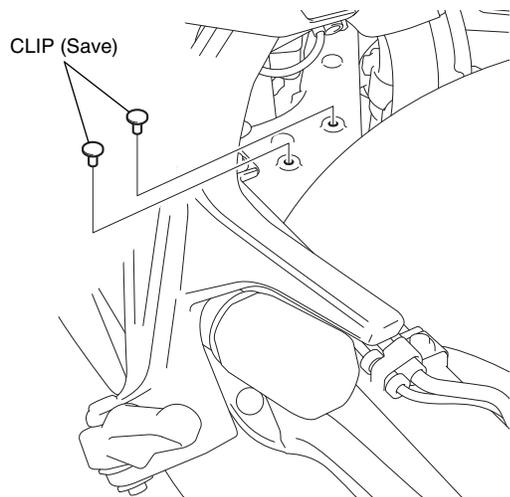

3. Install the hugger stay to the hugger as shown.

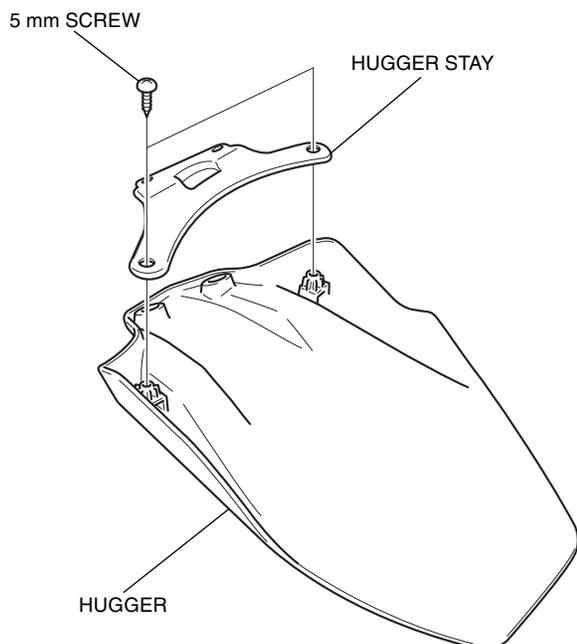

4. Install the assembled hugger on the motorcycle.

<Rear side>

