



HONDA


INSTALLATION INSTRUCTIONS

Accessory
LOWER HEADLIGHT COVER
 P/N 08F89-MGZ-J00

Application
CBR500R/RA

Publication No.
MII 14448
 Issue Date
February 2013

PARTS LIST

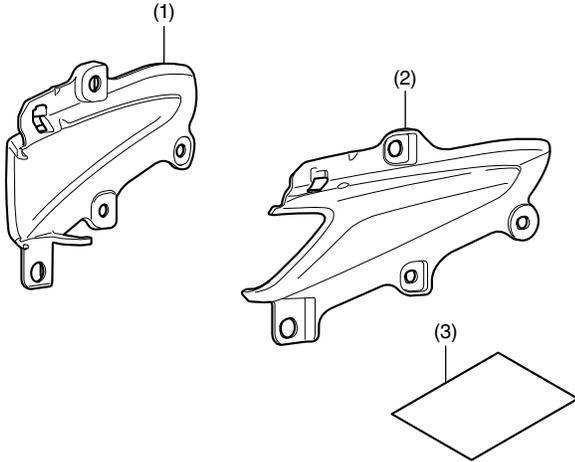

No.	Description	Qty
(1)	Right lower headlight cover	1
(2)	Left lower headlight cover	1
(3)	Installation Instruction URL	1

TORQUE INFORMATION

Refer to the Service Manual for the torque values of the removed parts.

INSTALLATION


▲ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


NOTE:

- Take care not to damage the painted surfaces of the motorcycle.
- Reinstall the removed parts on the motorcycle and make sure that wires and harnesses are not pinched.
- Disconnect the negative (-) cable from the battery before installing this accessory.
- The memory of the trip meter will be erased and the clock will stop when the battery is disconnected. After reconnecting the battery, refer to the motorcycle Owner's Manual and reset the clock.

- Refer to the Service Manual for the motorcycle, remove the seats.

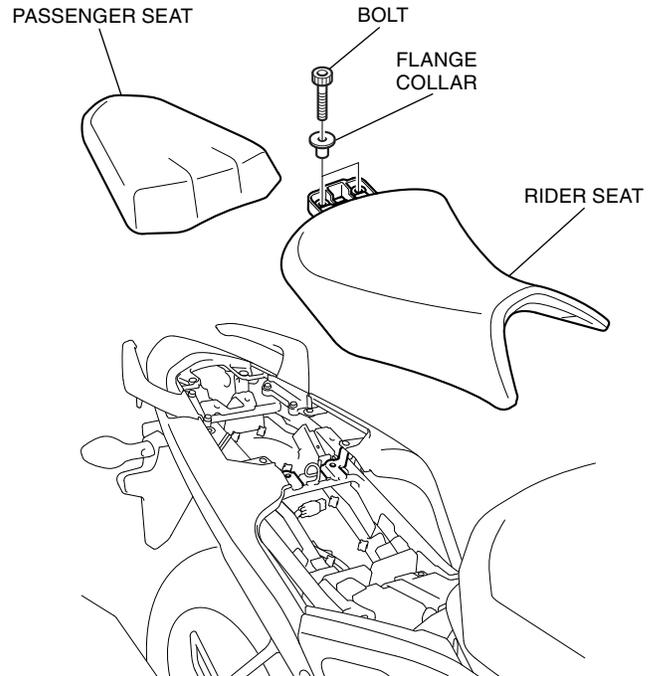


- Disconnect the negative (-) cable from the battery as shown.

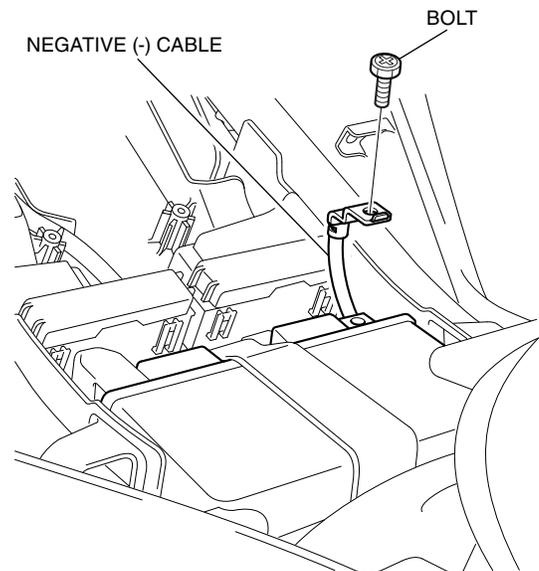


3. Refer to the Service Manual for the motorcycle, remove the right and left side covers.
 - Repeat on the left side.




4. Refer to the Service Manual for the motorcycle, remove the center lower headlight cover.

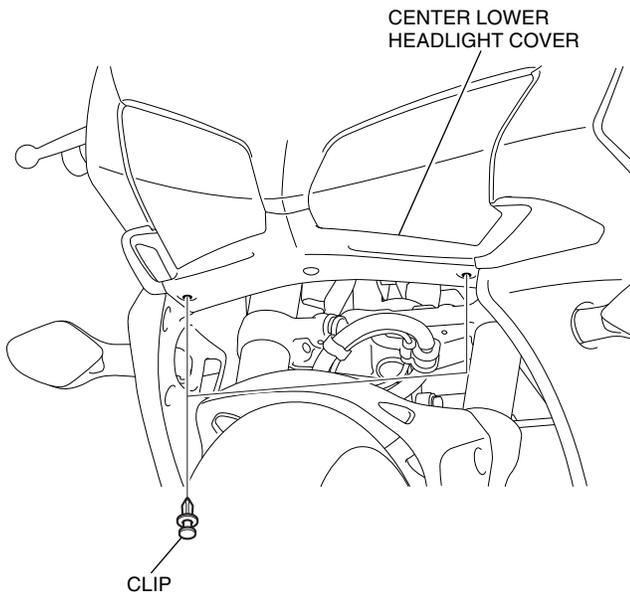


5. Refer to the Service Manual for the motorcycle, remove the left and right middle cowls.
 - Repeat on the right side.

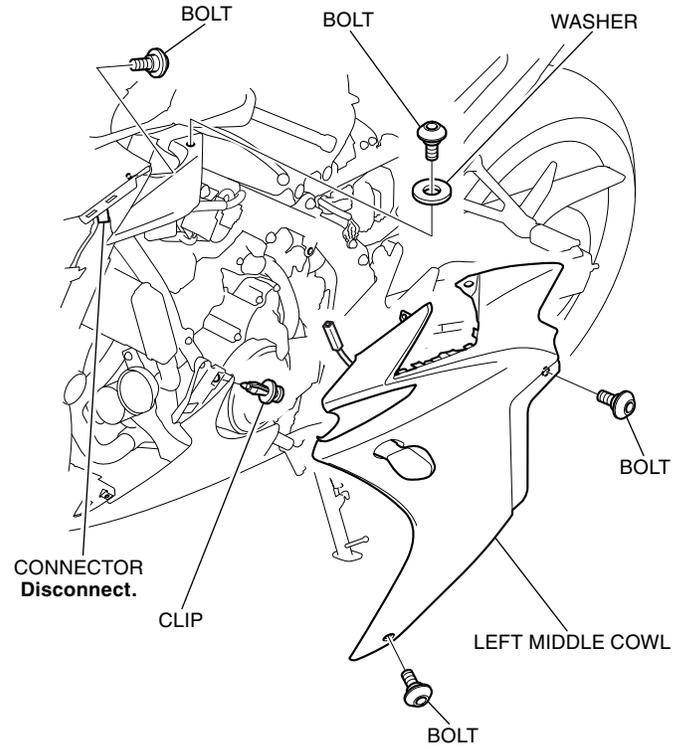


6. Refer to the Service Manual for the motorcycle, remove the motorcycle parts.

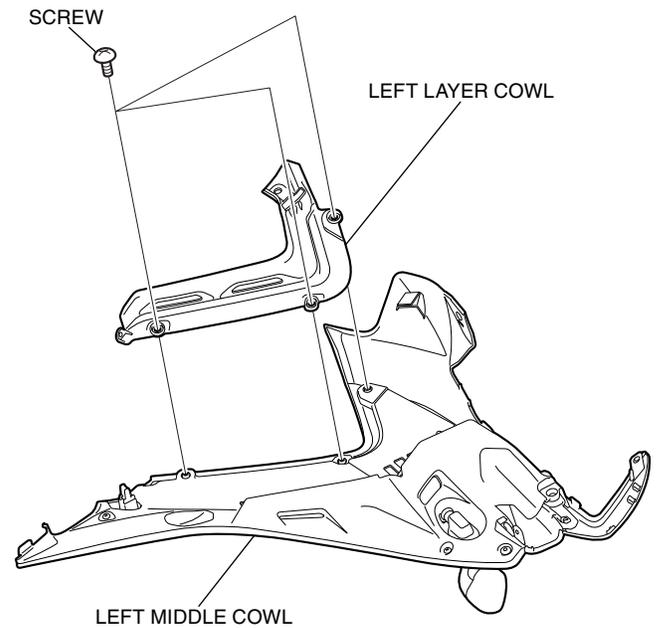


7. Refer to the Service Manual for the motorcycle, remove the motorcycle parts.

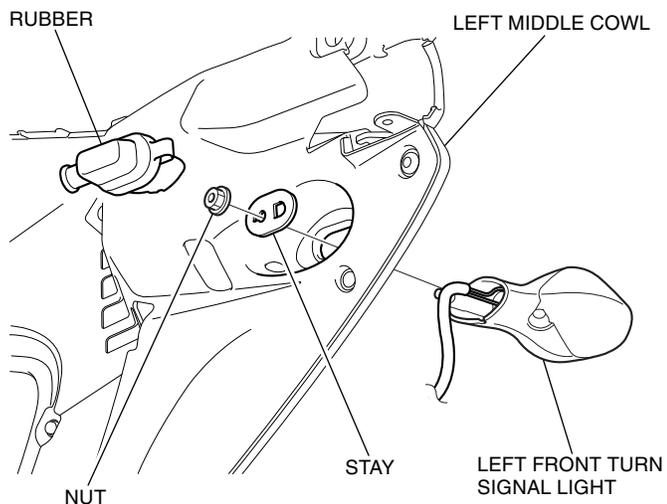

8. Refer to the Service Manual for the motorcycle, remove the motorcycle parts.

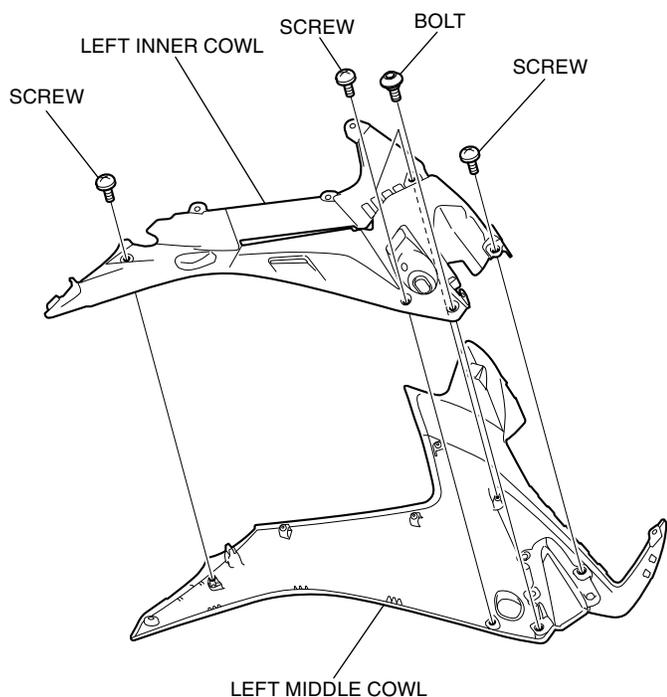

9. Remove the existing left lower headlight cover as shown.

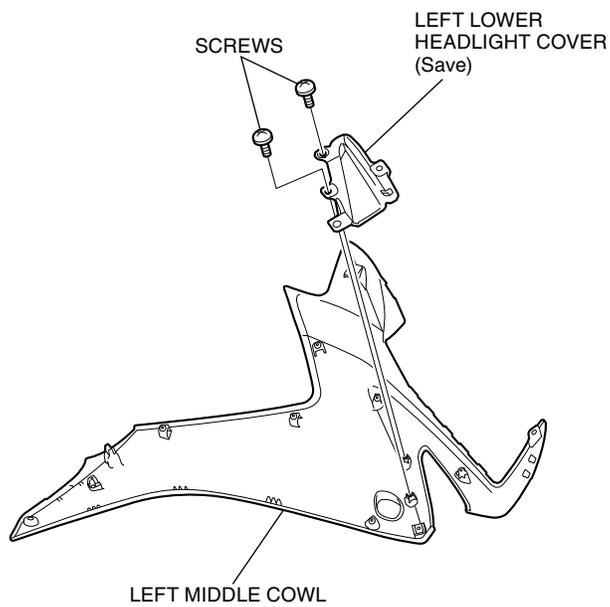

10. Install the accessory left lower headlight cover in the reverse order of removal.

11. Repeat on the right side.

12. Install the motorcycle's parts in the reverse order of removal.