


HONDA

INSTALLATION INSTRUCTIONS

Accessory	Application	Publication No.
INNER COWL P/N 08F94-MGZ-J40	CB500F/FA	MII 14448
		Issue Date
		February 2013

PARTS LIST

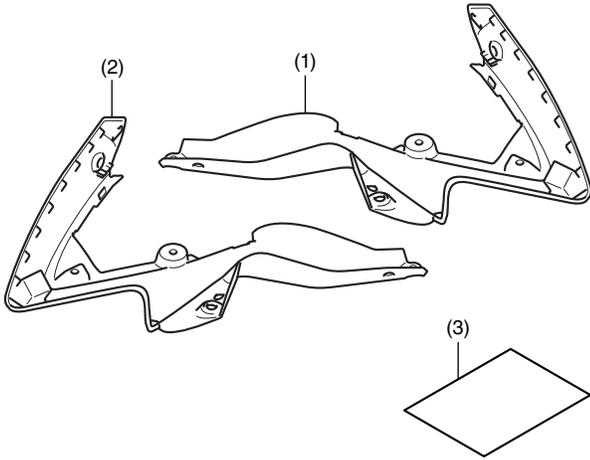

No.	Description	Qty
(1)	Right inner cowl	1
(2)	Left inner cowl	1
(3)	Installation Instruction URL	1

SUPPLIES REQUIRED

Isopropyl alcohol
Shop towel

TORQUE INFORMATION

Refer to the Service Manual for the torque values of the removed parts.

INSTALLATION


▲ CAUTION

- To prevent burns, allow the engine, exhaust system, radiator, etc., to cool before installing the accessory.


NOTE:

- Take care not to damage the painted surfaces of the motorcycle.
- Reinstall the removed parts on the motorcycle and make sure that wires and harnesses are not pinched.

- Refer to the Service Manual for the motorcycle, remove the right and left side covers.
 - Repeat on the left side.

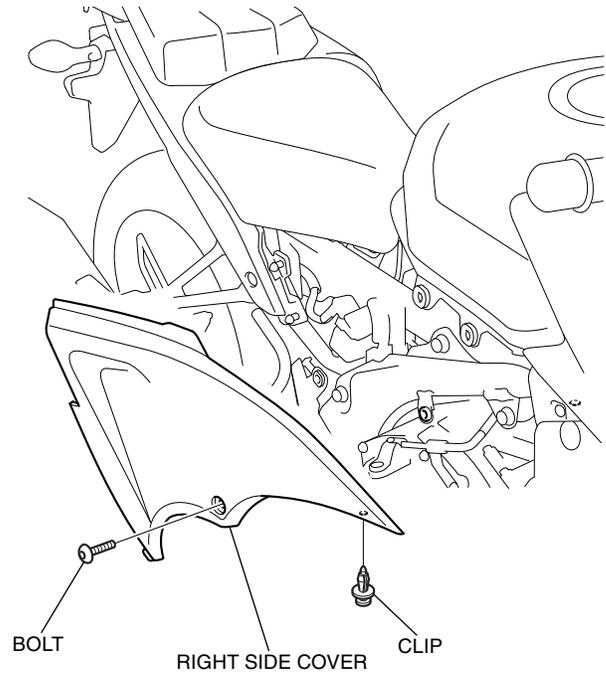


- Refer to the Service Manual for the motorcycle, remove the right and left shrouds.
 - Repeat on the left side.

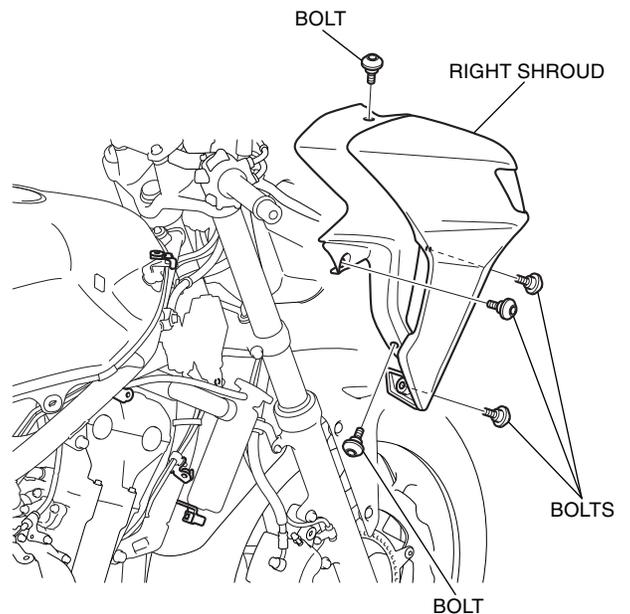


3. Remove the existing inner cowls as shown.

<RIGHT SIDE>

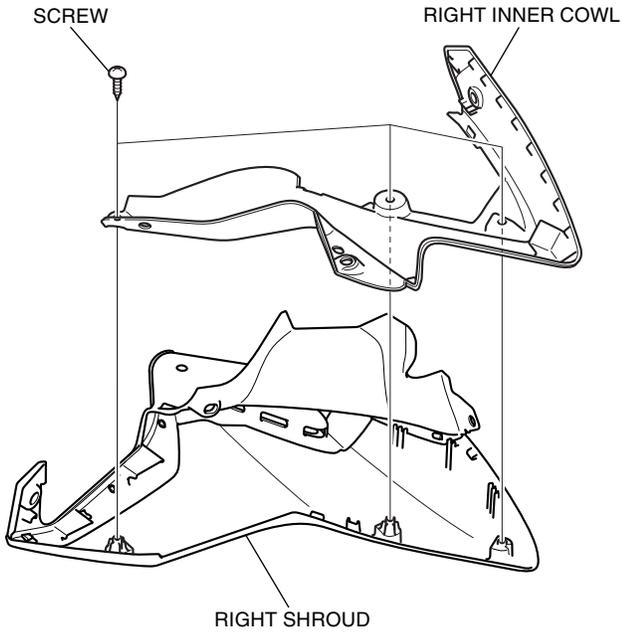


<LEFT SIDE>

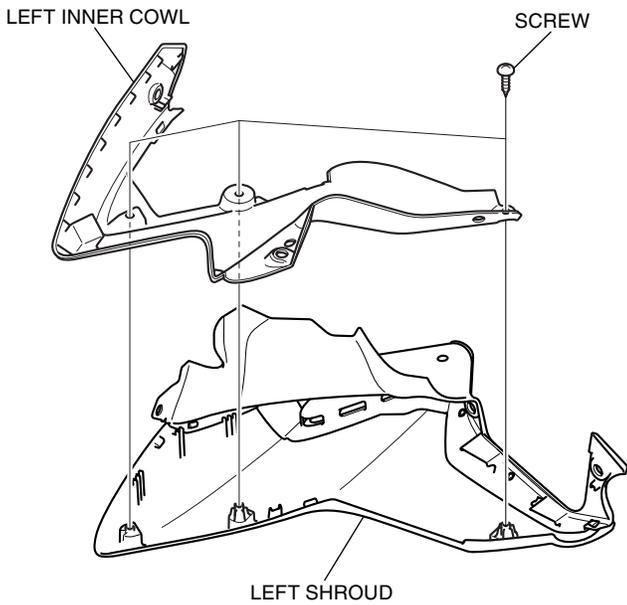


4. Remove the hook-and-loop fastener as shown.

<RIGHT SIDE>

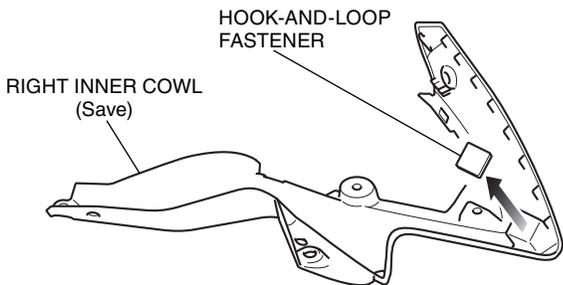


<LEFT SIDE>

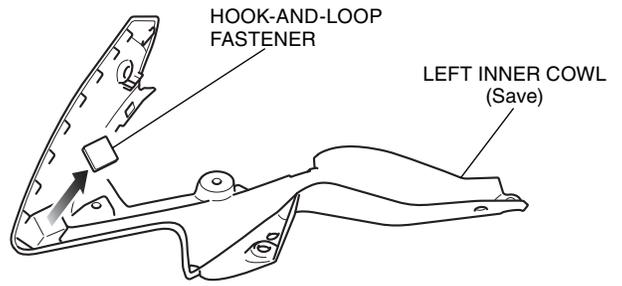


5. Attach the hook-and-loop fasteners to the accessory inner cowls in the position shown.

<RIGHT SIDE>

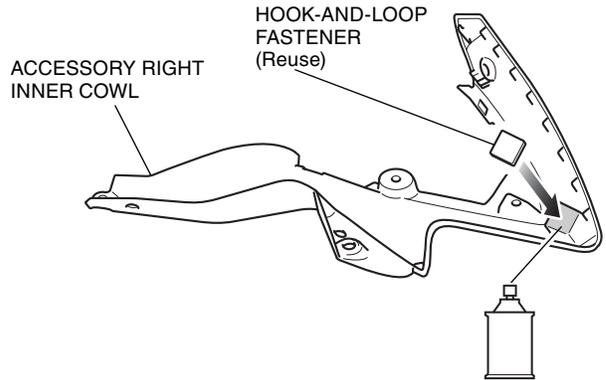

ISOPROPYL ALCOHOL
Thoroughly clean the area where the hook-and-loop fastener will be attached.

<LEFT SIDE>

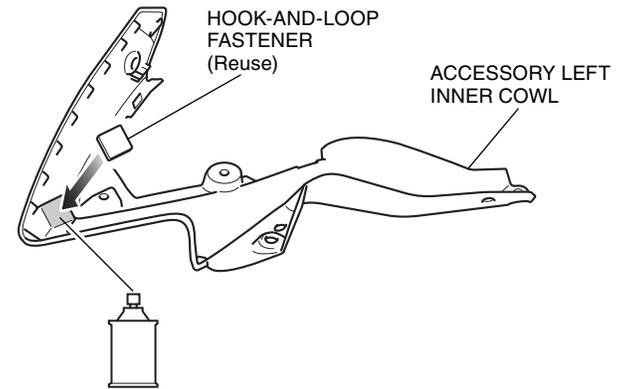

ISOPROPYL ALCOHOL
Thoroughly clean the area where the hook-and-loop fastener will be attached.

6. Install the inner cowls in the reverse order of removal.

7. Install the motorcycle's parts in the reverse order of removal.